

# SPECIFICATION



MODEL			SB-40	SB-60	SB-80	SB-100	SB-155	SB-225	SB-300	SB-485
<b>Units of Measurement</b>	<b>Metric</b>	<b>US</b>								
Maximum Capacity	kg.	lbs.	18.1 (40)	27.2 (60)	36.3 (80)	45.4 (100)	70.3 (155)	102.1 (225)	136 (300)	220.0 (485)
<b>Overall Dimensions :</b>										
A - Machine Width	mm.	inch	1208 (47.6")	1478 (58.2")	1492 (58.7")	1672 (65.8")	1615 (63.6")	1973 (77.7")	2325 (91.54")	2585 (101.8")
B - Machine Depth	mm.	inch	1121 (44.13")	1121 (44.13")	1279 (50.35")	1279 (50.35")	1596 (62.83")	1596 (62.83")	1765 (69.49")	2155 (84.8")
C - Machine Height	mm.	inch	1467 (57.76")	1467 (57.76")	1681 (66.18")	1681 (66.18")	2124 (83.62")	2124 (83.62")	2100 (82.67")	2625 (103.3")
<b>Cylinder Information :</b>										
Basket Diameter	mm.	inch	650 (25.59")	650 (25.59")	790 (31.1")	790 (31.1")	1069 (42.09")	1069 (42.09")	1200 (47.24")	1400 (55.12")
Basket Depth	mm.	inch	550 (21.65")	820 (32.28")	750 (29.53")	930 (36.61")	790 (36.61")	1150 (45.28")	1205 (47.44")	1430 (56.30")
Basket Volume	cu.m.	cu.ft.	0.18 (6.36)	0.27 (9.53)	0.37 (13.07)	0.45 (15.9)	0.709 (25.04)	1.032 (36.45)	1.40 (49.44)	2.2 (77.69)
Drum Compartment	Number		1	1	1	1	3	3	3	3+3
<b>Door Opening and Height :</b>										
Door Open Size Width	mm.	inch	280 (11.02")	280 (11.02")	300 (11.81")	300 (11.81")	400 (15.75")	400 (15.75")	450 (17.72")	450 (17.72")
Door Open Size Length	mm.	inch	400 (15.75")	515 (20.28")	515 (20.28")	600 (23.62")	600 (23.62")	705 (27.76")	760 (29.92")	1160 (45.67")
<b>Drive Information :</b>										
Number of Motors	Number		1	1	1	1	2	2	2	2
Size of Motor	kW	HP	2.2 (3)	3.7 (5)	5.5 (7.5)	7.5 (10)	5.5 (7.5)	7.5 (10)	11 (15)	18.5 (25)
<b>Cylinder Speeds (Programmable):</b>										
Wash	RPM	G-Force	47 (0.8)	47 (0.8)	43 (0.8)	43 (0.8)	39 (0.8)	37 (0.8)	34.5 (0.8)	32 (0.8)
Distribution	RPM	G-Force	91 (1.7)	91 (1.7)	67 (1.7)	62 (1.7)	69 (1.7)	65 (1.7)	50 (1.7)	47 (1.7)
Extract 1	RPM	G-Force	380 (52.4)	380 (52.4)	426 (80.1)	426 (80.1)	286 (48.8)	285 (48.5)	669 (300)	300 (70.4)
Extract 2	RPM	G-Force	957 (335)	957 (335)	825 (350)	825 (350)	710 (350)	710 (350)	720 (350)	600 (330)
<b>Water Inlets and Consumption :</b>										
Hot Water Size	NPT		3/4"	3/4"	3/4"	3/4"	1"	1-1/4"	1-1/2"	1-1/2"
Cold Water Size	NPT		3/4"	3/4"	3/4"	3/4"	1"	1-1/4"	1-1/2"	1-1/2"
Additional Water Inlet	NPT		3/4"	3/4"	3/4"	3/4"	1"	1-1/4"	1-1/2"	1-1/2"
Average HOT Water Consumption/Cycle	liters	gal	36 (10)	51 (14)	82 (22)	96 (25)	131 (35)	186 (49)	229 (60)	430 (114)
Average COLD Water Consumption/Cycle	liters	gal	92 (24)	129 (34)	172 (45)	204 (54)	289 (76)	405 (107)	553 (146)	953 (252)
<b>Drain Outlets and Capacity :</b>										
Number of Drains	Standard	Optional	1 (2)	1 (2)	1 (2)	1 (2)	2	2	2	2
Drain Size	mm.	inch	76.2 (3")	76.2 (3")	76.2 (3")	76.2 (3")	102 (4")	102 (4")	102 (4")	102 (4")
Drain Capacity	liters/min	gal/min	724 (191)	724 (191)	793 (209)	793 (209)	1639 (433)	1639 (433)	1733 (457)	1866 (493)
<b>Steam Inlet and Consumption :</b>										
Steam Inlet Connection	NPT		1/2"	1/2"	1/2"	3/4"	3/4"	1"	1"	1-1/4"
Steam Pressure	bar	psi	8.6 (125)	8.6 (125)	8.6 (125)	8.6 (125)	8.6 (125)	8.6 (125)	8.6 (125)	8.6 (125)
Steam Consumption	kg/hr	lb/hr	60 (133)	88 (193)	116 (256)	142 (314)	216 (477)	309 (681)	403 (889)	640 (1411)
<b>Compressed Air System :</b>										
Air Inlet Connection	NPT		N/A	N/A	N/A	N/A	3/8"	3/8"	3/8"	3/8"
Air Pressure	bar	psi	N/A	N/A	N/A	N/A	8.6 (125)	8.6 (125)	8.6 (125)	8.6 (125)
<b>Power of Electrical Heating :</b>										
Electrical Power	kW		12	18	24	36	54	54	72	N/A
<b>Weight and Shipping Information :</b>										
Net Weight (approx.)	kg.	lbs.	998 (2200)	1077 (2374)	1540 (3395)	1685 (3715)	2476 (5459)	2794 (6160)	4525 (9976)	5097 (11237)
Domestic Shipping Weight (approx.)	kg.	lbs.	1028 (2266)	1105 (2436)	1568 (3457)	1715 (3781)	2541 (5602)	2877 (6343)	4605 (10152)	5193 (11449)


Specification of design is subject to change without notice. For additional options please consult factory and distributor.

## Standard Features :

- All wetted parts are 304 (18/8) stainless steel
- 5 Compartment supply dispenser
- Advanced microprocessor
- 300G extract force
- Built in vacuum breaker
- Variable frequency drive
- Stainless steel cabinet

## Optional Features :

- Direct steam heating
- Electrical heating
- EMI filter for CE
- Water Recovery System
- Automatic drum positioning
- Pneumatic door lock

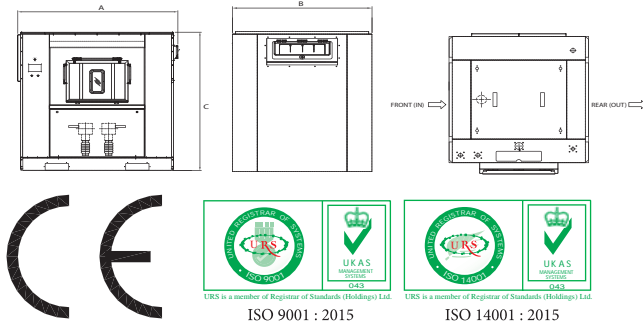

CONTACT: Mr. SOK PIETH  
PHONE: 081 44 22 03 / 085 666 184  
EMAIL: piseth@phsasia.com.kh

Siem Reap: #S1033, S1034, S1035 Borey Teschor, Kork Tnaot Village, Kandek Commune, Prasat Bakong District, Siem Reap Province.  
Phnom Penh: #19, St.16 Borey Piphub Thmey Toulasangke, Russey Keo, Cambodia



# Washer Extractor

## SB Series

MODEL : SB-40, SB-60, SB-80, SB-100,  
SB-155, SB-225, SB-300, SB-485



# SB Series - SOFTMOUNT

The Image SB Series - Softmount Barrier Washers for small, medium and Large On-Premise Laundry Applications where Hygiene is a major concern, such as Health Care or Clean Room Applications.

## *The SB series - Outstanding Reliability and Efficiency at an Affordable Price*

The SB series is a solution for clean room applications. It is purposely designed and built to ensure that the garments cleaned are processed at the highest level of quality possible. The robust machine is designed to last for many years and the performance has proven to be reliable. The SB model has also been designed and manufactured with quality in mind, using fewer parts while still achieving greater flexibility and strength. The use fewer parts results in lower maintenance over the life of the machine. The freestanding design allows for installation of the machines in unconventional places.


## *Powerful Control System*

The microprocessor touch screen control center is easy to use and has the features needed for maximum productivity and lowest cost of operation. The microprocessor touch screen controls the temperature, water level, speed and maintenance interval of the machine. A thermal cool down is programmable that will ensure optimal performance for any garments that require special wrinkle control and other special treatments. It can be programmed from the touch screen or with a laptop computer. The microprocessor touch screen control can be programmed to display in four languages. It has features for programming any wash activity to meet today and tomorrow's demand for water treatment of textile fiber and garments. It is the most flexible control system yet developed for the stand-alone commercial and industrial washers in the industry and has a proven track record for reliability.



## *Door Opening System*

Loading and unloading are fast and easy. The door is constructed of stainless steel for extra strength and durability. The door opening system has been engineered to make the operation safe, simple and reliable. For hygienic purposes, the machine has separate loading and unloading doors. The stainless steel basket for durability and ease of maintenance.

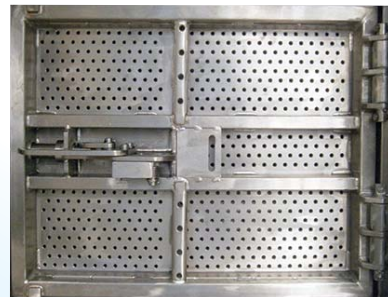

## *Supply Dispenser and External Liquid Supply Connection*

A 5 compartment dispenser for both liquid and powder detergents is standard. The dispenser is mounted on the side of the machine at a convenient height for easy reach. The dispenser is flushed automatically during the wash cycle. All machines are provided with five supply signals and liquid connections as standard equipment.



## *Robust Energy Efficient Drive*

The motor is controlled electronically by a variable frequency drive. The inverter reduces the peak energy demand, saves energy and lowers the inrush current. It is also a watchdog for the motor, protecting against overload and over voltage. The inverter makes it possible to achieve higher extract speeds, which significantly saves energy and time in the drying process.



## *Freestanding Construction and Suspension System*

The suspension system has been designed and engineered for stability and performance. The spring suspension is standard on the 40 and 100 pounds models while the air cushion suspension is standard on the larger capacities. The suspension system means no need for expensive foundation or floor modifications.



## *Solid Bearing Housing Structures*

The machine assembly uses by heavy duty bearings. The bearings are located outside of the wash solution and reduce possibility of damaged should the seals leak.

