lincat frifri





HB1 - Lincat Seal Countertop Heated Display Base -1 x 1/1 GN - W 380 mm -0.5 kW

Minimum food holding temperature of 72°C

- Thermostatic control allows base heat to be adjusted to suit a variety of food products
- Aluminium surface for energy-efficient heat conduction

The Seal Heated Display Base is an affordable choice where overhead heat and illumination is not required, for example where covered dishes are served.

- An affordable choice for when overhead heat and illumination is not needed – for example where covered dishes are served
- Robust stainless steel construction hygienic and easy to clean

Specifications


Brand RangeLincatTotal Power KW0.50RangeSealTemperature Range °CB8[minmum]Power TypeElectricIP RatingIP33Unit TypeCounter-topTemperature ControlMechanicalAvailable in UK OnlyNoVerse Pars Parts and Labour WarrantyVerse Pars Parts and Labour WarrantyVerse Pars Parts and Labour WarrantyExport WarrantyContact your local dealerSoS6105104308Sos105104308Key SpecificationsCapacityCapacityHeated Base Heated GantryYesSastonorm Capacity1x GN1/1Weights and DimensionsSupply ConnectionsNoUnit Height (External) mm12Requires InstallationNoUnit Width (External) mm380Requires InstallationNoNot Weight Kg7.2Requires InstallationNoNot Key Specifications1/2Requires InstallationNoElectrical Supply Rating Watts Single Phase VoltageSo0So0Single Phase Voltage2.2Single Phase Voltage2.30	Summary		Power and Performance	Power and Performance	
Heated Base Heated GantryYes NoGastronorm Capacity1x GN1/1Weights and DimensionsSupply ConnectionsUnit Height (External) mm112Requires InstallationNoUnit Width (External) mm380Requires Electrical SupplyYesUnit Depth (External) mm505UK 3 Pin PlugYesNet Weight Kg7.2Requires Hardwiring Electrical Supply Rating Watts Single Phase Amps500	Range Power Type Unit Type Available in UK Only UK Warranty Export Warranty	Seal Electric Counter-top No 2 Years Parts and Labour Warranty Contact your local dealer	Temperature Range °C IP Rating	68 [minimum] IP33	
Heated Gantry No Weights and Dimensions Supply Connections Unit Height (External) mm 112 No Requires Installation Unit Width (External) mm 380 Veights Sold Requires Electrical Supply Veight (External) mm 505 Unit Depth (External) mm 505 Veight Kg 7.2 Requires Hardwiring No Electrical Supply Rating Watts 500 Single Phase Amps 2.2	Key Specifications		Capacity		
Unit Height (External) mm 112 Requires Installation No Unit Width (External) mm 380 Requires Electrical Supply Yes Unit Depth (External) mm 505 UK 3 Pin Plug Yes Net Weight Kg 7.2 Requires Hardwiring No Electrical Supply Rating Watts 500 Single Phase Amps 2.2			Gastronorm Capacity	1 x GN1/1	
Unit Width (External) mm 380 Requires Electrical Supply Yes Unit Depth (External) mm 505 UK 3 Pin Plug Yes Net Weight Kg 7.2 Requires Hardwiring No Electrical Supply Rating Watts 500 Single Phase Amps 2.2	Weights and Dimensions		Supply Connections		
	Unit Width (External) mm Unit Depth (External) mm	380 505	Requires Electrical Supply UK 3 Pin Plug Requires Hardwiring Electrical Supply Rating Watts Single Phase Amps	Yes Yes No 500 2.2	

Packed Weight Kg	9.9
Packed Height cm	25
Packed Width cm	70
Packed Depth cm	55

Technical Picture





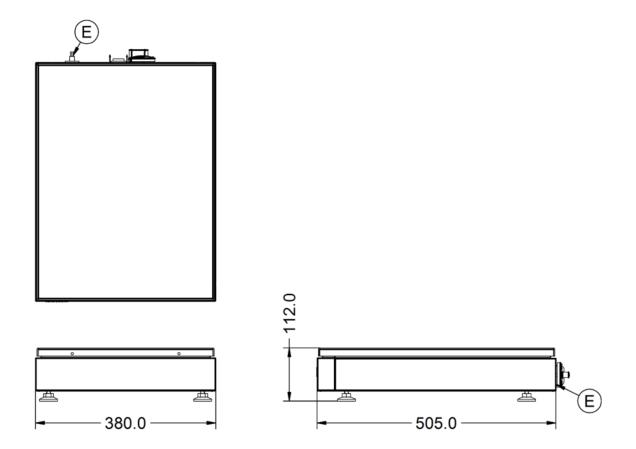

Lincat frifri

Lincat Limited

Whisby Road, Lincoln, LN6 30Z,

United Kingdom

Company No: 2175448

A member company of



Customer Care

Tel: +44 1522 875500

Email: care@lincat.co.uk

Export Customers

Tel: +44 1522 503250 Email: export@lincat.co.uk

Opening Hours

Monday – Friday: 8.30am – 5pm